


EXIT-848

LED Emergency Driver

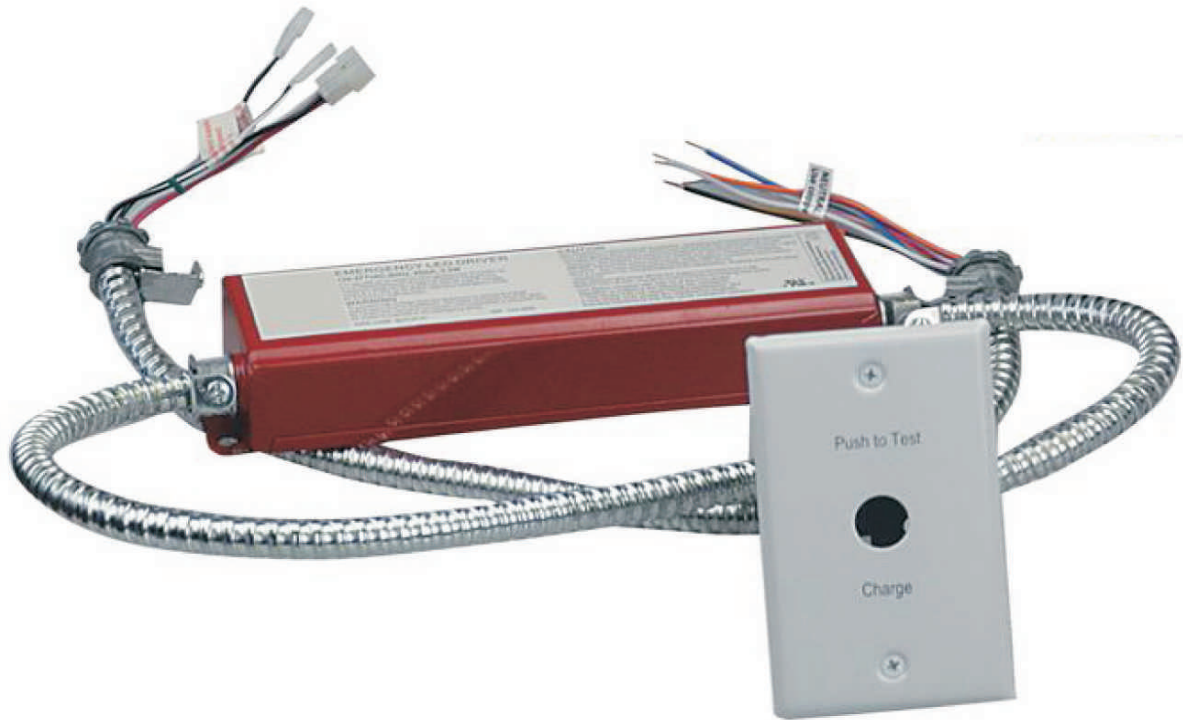

DESCRIPTION

- *120/277VAC universal voltage operation
- *Maintenance-free rechargeable Nickel-cadmium battery
- *LED indicator with test switch provided
- *Factory installation
- *90 minutes discharging time when normal power fails
- *UL and cUL recognized component
- *Suitable for damp location
- *Maximum output power: 5 Watt
- *Flexible output voltage: 3-30 VDC
- *Battery: 3.6V 4.5Ah